

Flotation units with dissolved air DELTA range

Flotation units with dissolved air allow accelerating the separation of water and suspended solids. Compact and simple of use, they make it possible to recover at the same time floated and settling particles, and produce rejections with strong content of dry matter.




- Simple of use
- Compact construction
- Capacity for treatment: 10 to 150 m³/h according to the models
- Low cost of maintenance
- Recovery of the solids on the surface and at the bottom of the flotation unit
- Single system of drainage of the recovered solids



Applications:

Food industry (dairy, slaughter-houses, fish industry, factories of transformations,...)
 Petrochemical Industry
 Paper Industry
 Textile industry
 Urban plants
 Water treatment of ballast

	Lenght (mm)	Width (mm)	Height (mm)	Capacity (m³/h)
DELTA 10	2500	1320	1965	10
DELTA 15	2500	1820	1965	15
DELTA 20	2500	1900	2500	20
DELTA 35	3000	1900	2500	35
DELTA 50	3000	2320	2500	50
DELTA 75	2700	3600	3000	75
DELTA 100	4550	2310	3500	100
DELTA 125	4550	2720	3750	125
DELTA 150	4550	3100	3750	150

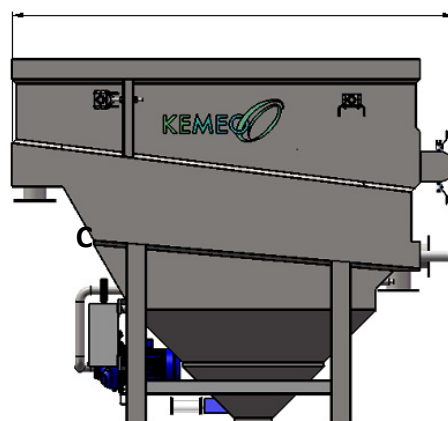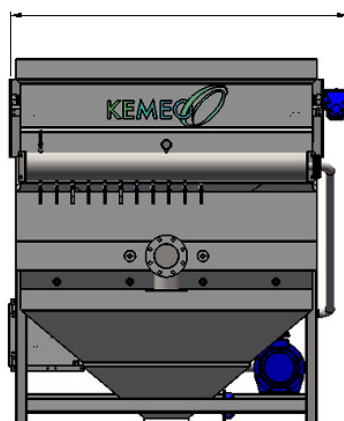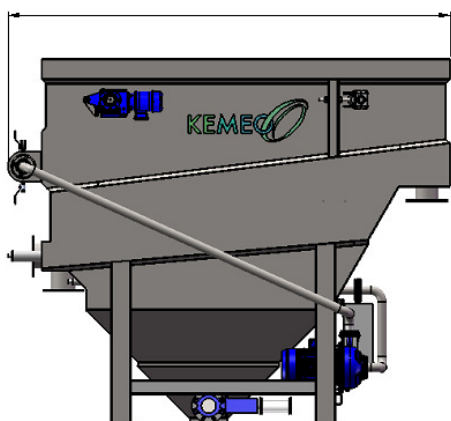

Operating principle:

GENERAL PID DELTA

